


MEET OUR HIGH PERFORMANCE AND HIGH-DENSITY POLYPIPE.

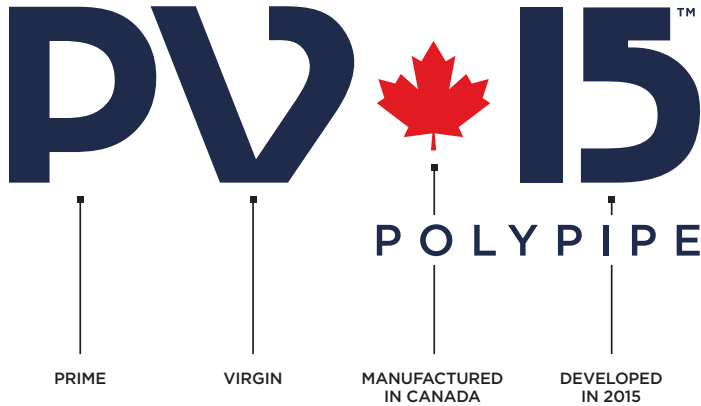


PV15™ IS OUR HDPE BRAND

This innovation in strength, flexibility and technology all rolled into one, is a must-have for telecom and utility companies. Built to withstand up to 3300 psi tensile (industry standards are 3000 psi), PV15™ boasts high stress crack resistance coupled with the ultimate in flexibility to make following trench contours easier than ever.

PRODUCT FEATURES:

- Tried and tested by our certified engineers in our onsite lab
- All PV15™ products meet and exceed ASTM F2160
- Proudly manufactured in Canada
- No minimum orders (on stock products)
- In stock items shipped within 24 hours

Attwell Plastics
SINCE 1980

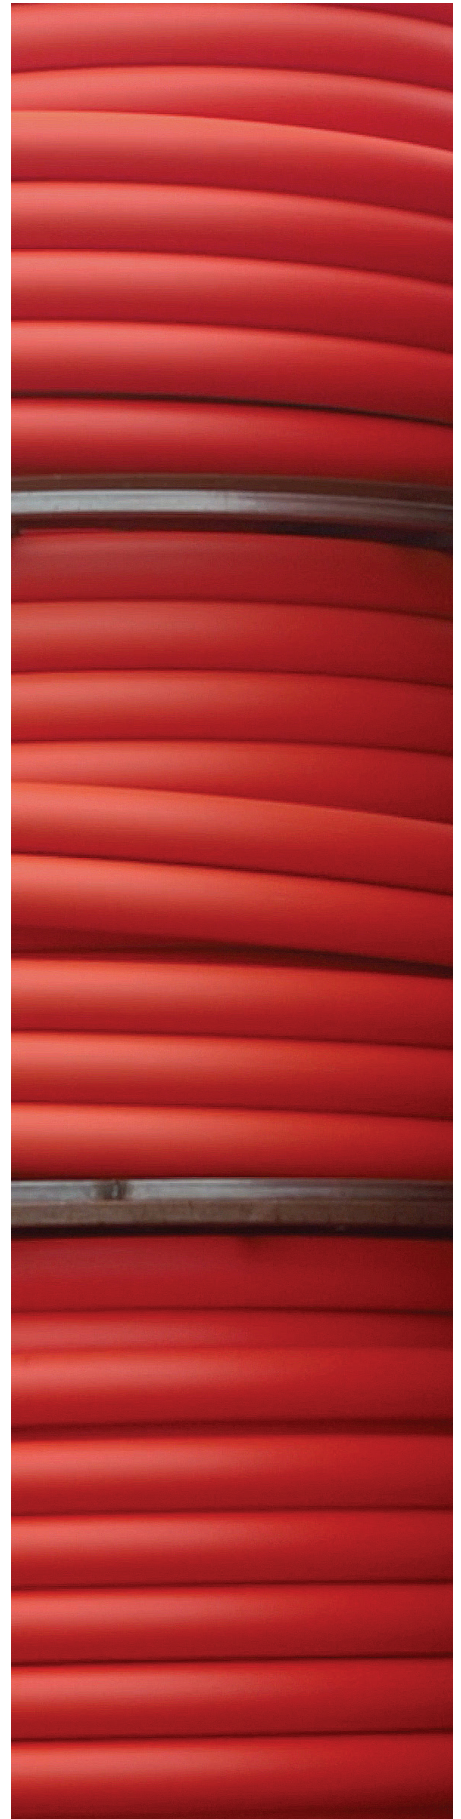



HDPE CONDUIT SPECIFICATIONS

SDR 9	3/4"	1.00"	1.25"	1.50"	2.00"	2.50"	3.00"	4.00"	5.00"	6.00"
Nominal OD	1.05	1.315	1.66	1.9	2.375	2.875	3.5	4.5	5.563	6.625
OD Tolerance +/-	0.005	0.007	0.008	0.01	0.012	0.014	0.018	0.023	0.028	0.033
Min. Wall (in.)	0.117	0.146	0.184	0.211	0.264	0.319	0.389	0.5	0.618	0.736
Wall Tolerance +	0.02	0.02	0.022	0.025	0.032	0.038	0.047	0.06	0.074	0.088
Min. ID (in.)	0.776	0.983	1.248	1.428	1.783	2.161	2.628	3.38	4.179	4.977
Average ID (in.)	0.796	1.003	1.27	1.453	1.815	2.199	2.675	3.44	4.253	5.065
Weight (lb/ft)	0.152	0.234	0.37	0.485	0.759	1.11	1.648	2.723	4.161	5.901
Bend Radius Supported (in.)	10	13	17	19	24	29	39	50	61	73
Bend Radius Unsupported (in.)	20	26	34	38	48	58	78	100	122	146
SWPS (lbs)	821	1288	2052	2688	4200	6155	9122	15080	23045	32684
SDR 11	3/4"	1.00"	1.25"	1.50"	2.00"	2.50"	3.00"	4.00"	5.00"	6.00"
Nominal OD	1.05	1.315	1.66	1.9	2.375	2.875	3.5	4.5	5.563	6.625
OD Tolerance +/-	0.005	0.007	0.008	0.01	0.012	0.014	0.018	0.023	0.028	0.033
Min. Wall (in.)	0.095	0.12	0.151	0.173	0.216	0.261	0.318	0.409	0.506	0.602
Wall Tolerance +	0.02	0.02	0.02	0.021	0.026	0.031	0.038	0.049	0.061	0.072
Min. ID (in.)	0.82	1.035	1.318	1.512	1.891	2.291	2.788	3.584	4.429	5.277
Average ID (in.)	0.84	1.055	1.338	1.533	1.917	2.322	2.826	3.633	4.49	5.349
Weight (lb/ft)	0.128	0.199	0.312	0.408	0.636	0.93	1.38	2.282	3.49	4.944
Bend Radius Supported	10	13	17	19	24	29	39	50	61	73
Bend Radius Unsupported	20	26	34	38	48	58	78	100	122	146
SWPS (lbs)	687	1078	1717	2249	3515	5151	7633	12618	19284	27349
SDR 13.5	3/4"	1.00"	1.25"	1.50"	2.00"	2.50"	3.00"	4.00"	5.00"	6.00"
Nominal OD	1.05	1.315	1.66	1.9	2.375	2.875	3.5	4.5	5.563	6.625
OD Tolerance +/-	0.005	0.007	0.008	0.01	0.012	0.014	0.018	0.023	0.028	0.033
Min. Wall (in.)	0.078	0.097	0.123	0.141	0.176	0.213	0.259	0.333	0.412	0.491
Wall Tolerance +	0.02	0.02	0.02	0.02	0.021	0.026	0.031	0.04	0.049	0.059
Min. ID (in.)	0.854	1.081	1.374	1.578	1.981	2.397	2.92	3.754	4.641	5.525
Average ID (in.)	0.874	1.101	1.394	1.598	2.002	2.423	2.951	3.794	4.69	5.584
Weight (lb/ft)	0.11	0.167	0.263	0.342	0.528	0.775	1.146	1.895	2.896	4.112
Bend Radius Supported	10	13	17	19	24	29	39	50	61	73
Bend Radius Unsupported	20	26	34	38	48	58	78	100	122	146
SWPS (lbs)	570	894	1425	1867	2917	4274	6335	10472	16004	22697
SDR 17	3/4"	1.00"	1.25"	1.50"	2.00"	2.50"	3.00"	4.00"	5.00"	6.00"
Nominal OD	1.05	1.315	1.66	1.9	2.375	2.875	3.5	4.5	5.563	6.625
OD Tolerance +/-	0.005	0.007	0.008	0.01	0.012	0.014	0.018	0.023	0.028	0.033
Min. Wall (in.)	0.062	0.077	0.098	0.112	0.14	0.169	0.206	0.265	0.327	0.39
Wall Tolerance +	0.02	0.02	0.02	0.02	0.02	0.02	0.025	0.032	0.039	0.047
Min. ID (in.)	0.886	1.121	1.424	1.636	2.055	2.497	3.038	3.906	4.831	5.751
Average ID (in.)	0.906	1.141	1.444	1.656	2.075	2.517	3.063	3.938	4.87	5.798
Weight (lb/ft)	0.091	0.138	0.217	0.281	0.432	0.625	0.928	1.534	2.339	3.324
Bend Radius Supported	10	13	17	19	24	29	39	50	61	73
Bend Radius Unsupported	20	26	34	68	48	58	78	100	122	146
SWPS (lbs)	460	722	1150	1507	2355	3450	5114	8453	12918	18321

